



7802 DISTRICT

6,6 Nylon 6,6

The strong chemical bonds found in nylon 6,6 provide excellent texture retention benefits, superior stain resistance and heat resistance properties. This fiber provides long lasting performance, protecting the beauty of your floor even in the most punishing environments.



Backing Performance

Kraus carpet tiles are manufactured to provide dimensional stability and will not delaminate from face fiber or edge ravel. Our Backing Performance warranty guarantees that the backing on this product will not shrink, grow, cup or dome, which ensures easy installation and product longevity.



ASTM E648 Class I

This product has passed the standard test method for critical radiant flux of floor-covering systems using a radiant heat energy source and meets the standards as defined within ASTM E648.



Lifetime Warranties

- Commercial Wear
- Backing Performance



07 | Peppler




05 | Kaleidoscope




03 | Ironwood



01 | Metro Stone

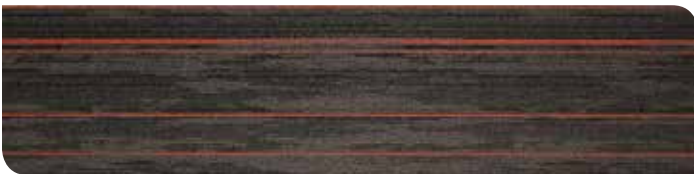

08 | Lennox

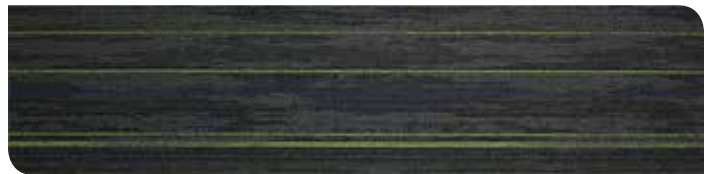

06 | Granite Path



04 | Aztec Temple



02 | Hudson Avenue

specifications

Supplier	Kraus®	
Fiber system	100% BCF Solution dyed nylon 6,6	
Construction	Multi-level scroll loop	
Backing system	FiberCore™ Modular	
Pile weight	16 oz./y ²	550 g/m ²
Pile height	0.10" / 0.20"	2.5 mm / 5 mm
Gauge	5/64	50.4 rows/10 cm
Stitches	9.0 s.p.i.	35.4 stitches/10 cm
Density	4950	7.14 kilotex/cm ²
Stain resistance	8.0 (AATCC 175) minimum	
CRI/CCI air quality test	Green Label Plus	GLP 2116
Environmental awareness	Eligible for any recycling program	
Static generation	3.0 kV or less (AATCC 134)	
Flammability	ASTM E648 – Class I (direct glue) ASTM D2859 – passes ASTM E662 – < 450 (flaming mode)	
Colorfastness to light	5.0 (AATCC 175)	

Modular size (w x l)	9.8" x 39.4"	25 cm x 100 cm
Packaging	20 tiles/carton 55 lbs/carton	5.98 y ² /carton 28 cartons/pallet
Recommended adhesive	Kraus Premium Adhesive™ KPA-301	
Installation method	Ashlar, Herringbone, Monolithic, Brick	
Lifetime Warranties (See full text for details)	Commercial Wear Backing Performance	

The natural characteristics of geometric or linear patterns in carpet tile can result in double-dark or double-light lines at the seam and to some degree a pattern run-off or bias. This is not a manufacturing defect. These characteristics should always be taken into consideration when choosing the installation method of a modular carpet. While select styles are offered in both modular and broadloom formats, they are not an exact match since the equipment used in the manufacturing of both patterns are entirely different. Product image colours may vary due to print processes and monitor display settings. To ensure that the installation meets the manufacturers requirements please note that Kraus Premium Adhesive is the recommended and required adhesive for this product. Failure to use this adhesive may void any warranty related claims. Please see installation instructions for full details. See krausflooring.com for latest specifications.

E&OE.

1605