




CushionBac 18™

Our best attached cushion enhances comfort and improves texture retention in areas with extra heavy foot and roller traffic.

features

- **Environmentally Friendly** — Cushion contains over 30% post-consumer recycled content.
- **Enhanced Comfort** — Provides carpets with a soft, luxurious feel, while also enhancing comfort underfoot.
- **Improved Texture Retention** — Absorbs stress due to foot or roller traffic. Carpets will look attractive and last longer because the pile fibers better retain their texture.
- **Trouble-Free Installation** —
 - Consistent gauge thickness aides in matching seams
 - Compatible with both permanent and release adhesive systems
 - Dimensionally stable. Stretchable for patterned installations
 - Resists buckling, curling and shrinking

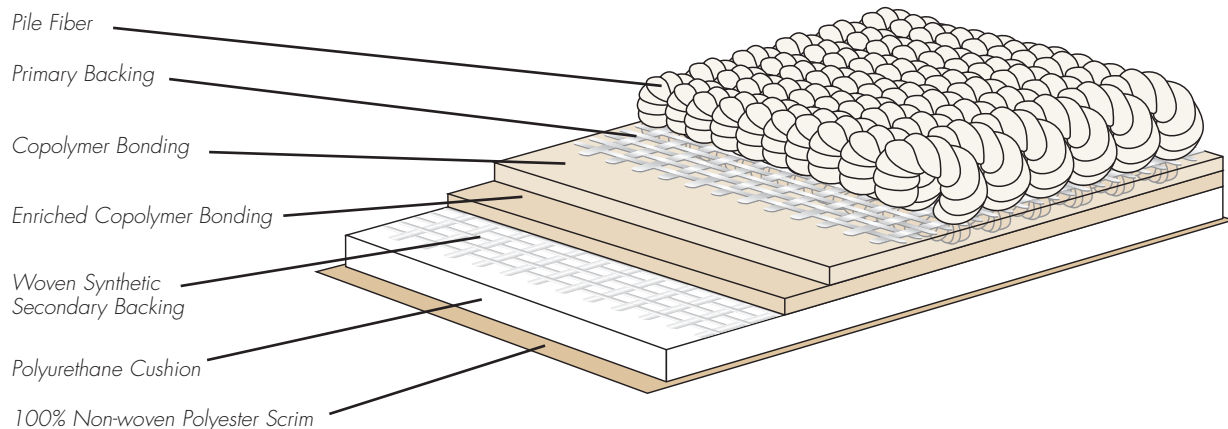

CushionBac 18™

recommended

for areas with very heavy foot and roller traffic

- Airports
- Transportation facilities
- Lobbies
- Corridors
- Banks
- Retail stores
- Hotels
- Casinos
- Schools
- Universities
- Offices
- Healthcare

specifications and warranties

Backing construction (12 feet wide)

- Dual copolymer bonding + 2 woven interliners
- 18 lb. density polyurethane cushion
- Non-woven polyester scrim

Cushion + Scrim

Recycled Content:

- CushionBac18™ system is 32 ounces per square yard, of which 30% is recycled content
- 100 % of the recycled content is post-consumer material

Thickness:

- ≈1/8 inch thick

Density:

- 18 lbs. per cubic foot

Backing warranties

- Lifetime ZipperLock® warranties available on selected styles. See full text for details.

simple installation

- Premium multi-purpose or releasable adhesive is recommended.
- Dry fit the precut carpet into the room, centering the carpet and allowing the surplus to lap against the walls evenly. Make sure there is enough carpet to reach to the center of thresholds in doorways and match pattern.
- When seams are necessary, they should be cut first. Row cut the edges removing a minimum 1 inch of foam from the factory edge. Do not double cut seams. Row cutting from the face is recommended with sharp cutting tools. Cut each seam edge separately.
- After seams are matched, make sure the pattern and nap are aligned. Then, fold the carpet back at the seam areas. Do not compress the seam. Seam cuts should all be net cuts.
- Apply adhesive to floor using a short notched trowel. Follow adhesive label instructions relating to open time.
- Secure the seams in accordance with CRI standard 104.

**Specifications are subject to normal manufacturing tolerances*

CushionBac™ has a non-woven scrim on the outside layer which is an integral part of the product. The receptivity to sticking to a variety of different grades or premium multi-purpose adhesive is enhanced because of this scrim. The scrim also reduces chunking of product at time of removal if proper installation procedures are followed.