



COORDINATES WITH
7806
SKYLINE

7805 AEROSPACE



Wear

Our carpet is guaranteed to withstand the wear and tear of daily life. Built to perform, Kraus carpet offers strength from face fiber to secondary backing.



ASTM E648 Class I

This product has passed the standard test method for critical radiant flux of floor-covering systems using a radiant heat energy source and meets the standards as defined within ASTM E648.




Backing Performance

Kraus carpet tiles are manufactured to provide dimensional stability and will not delaminate from face fiber or edge ravel. Our Backing Performance warranty guarantees that the backing on this product will not shrink, grow, cup or dome, which ensures easy installation and product longevity.



Lifetime Warranties

- Commercial Wear
- Backing Performance

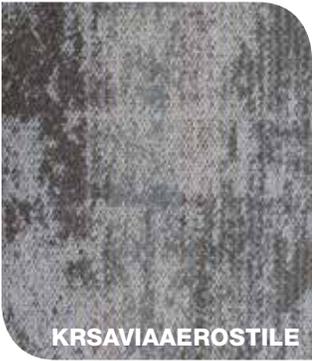


KRSVIAAEROSTILE

01 | Aviation



KRSTREEAEROSTILE

05 | Treetop

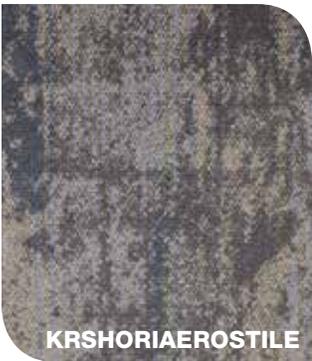

KRSHORIAAEROSTILE

06 | Horizon



KRSELEVAEROSTILE

07 | Elevate



KRSFLPAAEROSTILE

02 | Flight Path



KRSTATMOAEROSTILE

08 | Atmosphere

specifications

Supplier	Kraus®	
Fiber system	100% BCF Nylon	
Construction	Multi level loop	
Backing system	EuroBac™ Modular	
Pile weight	21 oz./y ²	720 g/m ²
Pile height	0.11"/0.26"	2.7 mm/6.7 mm
Gauge	1/10	39.4 rows/10 cm
Stitches	11 s.p.i.	43.3 stitches/10 cm
Density	4016	8.7 kilotex/cm ²
CRI/CCI air quality test	Green Label Plus	GLP 2094
Environmental awareness	Eligible for any recycling program	
Recycled content	EuroBac™ Modular backing - min. 20% pre-consumer 100% PVC free	
Static generation	3.0 kV or less (AATCC 134)	
Flammability	ASTM E648 – Class I (direct glue) ASTM D2859 - passes ASTM E662 – < 450 (flaming mode)	
Colorfastness to light	5.0 (AATCC 16)	
Modular size (w x l)	23.6" x 23.6"	60 cm x 60 cm
Packaging	14 tiles/carton 40 lbs/carton	6.0277 y ² /carton 40 cartons/pallet
Recommended adhesive	Kraus Premium Adhesive™ KPA-301	
Installation method	Monolithic, Quarter-Turn, Brick, Ashlar and Random	
Lifetime Warranties (See full text for details)	Commercial Wear Backing Performance	

The natural characteristics of geometric or linear patterns in carpet tile can result in double-dark or double-light lines at the seam and to some degree a pattern run-off or bias. This is not a manufacturing defect. These characteristics should always be taken into consideration when choosing the installation method of a modular carpet. While select styles are offered in both modular and broadloom formats, they are not an exact match since the equipment used in the manufacturing of both patterns are entirely different. Product image colours may vary due to print processes and monitor display settings. To ensure that the installation meets the manufacturers requirements please note that Kraus Premium Adhesive is the recommended and required adhesive for this product. Failure to use this adhesive may void any warranty related claims. Please see installation instructions for full details. See krausflooring.com for latest specifications.

E&OE.

1805