



7801 IMPULSE



Stain Proof – No Exceptions™

Perfecting the balance between dye technology and understanding a fiber's construction, our carpets feature a Stain Proof – No Exceptions warranty. Most spills can be easily removed through gentle blotting, allowing your carpet to remain beautiful in spite of life's little mishaps.



Backing Performance

Kraus carpet tiles are manufactured to provide dimensional stability and will not delaminate from face fiber or edge ravel. Our Backing Performance warranty guarantees that the backing on this product will not shrink, grow, cup or dome, which ensures easy installation and product longevity.



Wear

Our carpet is guaranteed to withstand the wear and tear of daily life. Built to perform, Kraus carpet offers strength from face fiber to secondary backing.



10 Year Warranties

- Stain Proof – No Exceptions™
- Commercial Wear
- Backing Performance

7801 IMPULSE




01 | Iced Marble



02 | Newburyport



03 | Northwood Trail

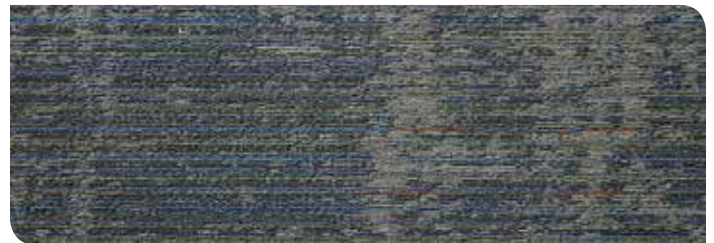

04 | Observatory



05 | Rain Dunes



06 | Umber Rust

specifications

Supplier	Kraus®	
Fiber system	100% BCF Polypropylene	
Construction	Multi-level scroll loop	
Backing system	EuroBac™ Modular	
Pile weight	16 oz./y ²	550 g/m ²
Pile height	0.10"/0.18"	2.5 mm/4.5 mm
Gauge	1/12	47.2 rows/10 cm
Stitches	9.9 s.p.i.	39 stitches/10 cm
Density	5982	9.4 kilotex/cm ²
CRI/CCI air quality test	Green Label Plus	GLP 1097
Environmental awareness	Eligible for any recycling program	
Recycled content	EuroBac™ Modular backing - min. 20% pre-consumer	
Static generation	3.0 kV or less (AATCC 134)	
Flammability	ASTM E648 – Class I (direct glue) ASTM D2859 – passes ASTM E662 – < 450 (flaming mode)	
Colorfastness to light	5.0 (AATCC 16)	

Modular size (w x l)	13.1" x 39.4"	33.3 cm x 100 cm
Packaging	16 tiles/carton 49.2 lbs/carton	6.37 y ² /carton 27 cartons/pallet
Recommended adhesive	Kraus Premium Adhesive™ KPA-301	
Installation method	Ashlar, Herringbone, Monolithic, Brick	
10 Year Warranties (See full text for details)	Stain Proof – No Exceptions™ Commercial Wear Backing Performance	

The natural characteristics of geometric or linear patterns in carpet tile can result in double-dark or double-light lines at the seam and to some degree a pattern run-off or bias. This is not a manufacturing defect. These characteristics should always be taken into consideration when choosing the installation method of a modular carpet. While select styles are offered in both modular and broadloom formats, they are not an exact match since the equipment used in the manufacturing of both patterns are entirely different. Product image colours may vary due to print processes and monitor display settings. To ensure that the installation meets the manufacturers requirements please note that Kraus Premium Adhesive is the recommended and required adhesive for this product. Failure to use this adhesive may void any warranty related claims. Please see installation instructions for full details. See krausflooring.com for latest specifications.

E&OE.

1605