



7804 POP ART

6,6 Nylon 6,6

The strong chemical bonds found in nylon 6,6 provide excellent texture retention benefits, superior stain resistance and heat resistance properties. This fiber provides long lasting performance, protecting the beauty of your floor even in the most punishing environments.



Backing Performance

Kraus carpet tiles are manufactured to provide dimensional stability and will not delaminate from face fiber or edge ravel. Our Backing Performance warranty guarantees that the backing on this product will not shrink, grow, cup or dome, which ensures easy installation and product longevity.



Wear

Our carpet is guaranteed to withstand the wear and tear of daily life. Built to perform, Kraus carpet offers strength from face fiber to secondary backing.




Lifetime Warranties

- Commercial Wear
- Backing Performance



02 | Green Envy

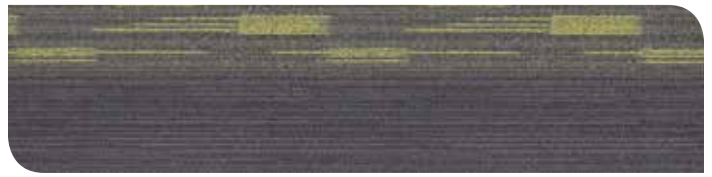

09 | Limelight




01 | Tidal



08 | Cobalt Teal



06 | Deco Blue

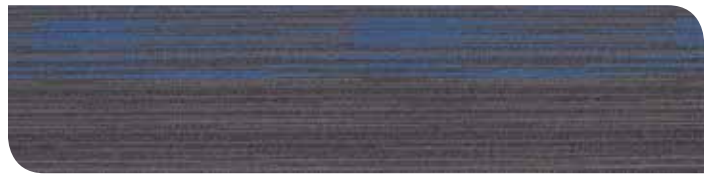

15 | Blue Suede



05 | Foreshadow



14 | Silver Screen



07 | Canvas Grey



16 | Black Gesso

specifications

Supplier	Kraus®	
Fiber system	100% BCF Universal Nylon 6,6	
Construction	Multi-level loop	
Backing system	EuroBac™ Modular	
Pile weight	19 oz./y ²	650 g/m ²
Pile height	0.10"/0.20"	2.5 mm/5.0 mm
Gauge	5/64	50.4 rows/10 cm
Stitches	9 s.p.i.	25.4 stitches/10 cm
Density	5520	7.25 kilotex/cm ²
Stain resistance	8.0 (AATCC 175) minimum	
CRI/CCI air quality test	Green Label Plus	GLP 2116
Environmental awareness	Eligible for any recycling program	
Recycled content	EuroBac™ Modular backing - min. 20% pre-consumer 100% PVC Free	
Static generation	3.0 kV or less (AATCC 134)	
Flammability	ASTM E648 – Class I (direct glue) ASTM D2859 – passes ASTM E662 – < 450 (flaming mode)	
Colorfastness to light	5.0 (AATCC 16)	

Modular size (w x l)	13.1" x 39.4"	33.3 cm x 100 cm
Packaging	15 tiles/carton	5.98 y ² /carton
	40 lbs/carton	30 cartons/pallet
Recommended adhesive	Kraus Premium Adhesive™ KPA-301	
Installation method	Ashlar, Herringbone	
Lifetime Warranties	Commercial Wear Backing Performance	
<small>(See full text for details)</small>		

The natural characteristics of geometric or linear patterns in carpet tile can result in double-dark or double-light lines at the seam and to some degree a pattern run-off or bias. This is not a manufacturing defect. These characteristics should always be taken into consideration when choosing the installation method of a modular carpet. While select styles are offered in both modular and broadloom formats, they are not an exact match since the equipment used in the manufacturing of both patterns are entirely different. Product image colours may vary due to print processes and monitor display settings. To ensure that the installation meets the manufacturers requirements please note that Kraus Premium Adhesive is the recommended and required adhesive for this product. Failure to use this adhesive may void any warranty related claims. Please see installation instructions for full details. See krausflooring.com for latest specifications.

E&OE.

1702

